
Phase V Part II Neighborhood Resurfacing Plans

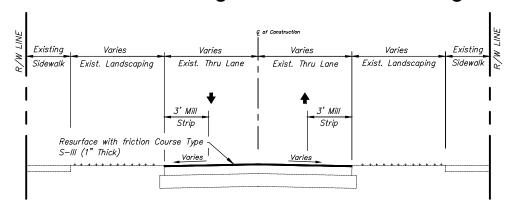


TYPICAL SECTION

NOTES:

- AT MATCH POINTS TO EXISTING ASPHALT TO REMAIN, CONTRACTOR SHALL MILL A MINIMUM 5' WIDE STRIP TO MATCH NEW PAVEMENT ELEVATION WITH EXISTING ELEVATION.
- 2. CONTRACTOR SHALL PLACE TEMPORARY STRIPING THE SAME DAY PAVING IS COMPLETED. THE THERMO PLASTIC PAVEMENT MARKINGS SHALL BE PLACED NO EARLIER THAN 30 DAYS AFTER ASPHALT OVERLAY COMPLETION.
- 3. ALL VALVES AND MANHOLES WITHIN PROJECT LIMITS SHALL BE ADJUSTED BY CONTRACTOR.
- 4. CONTRACTOR SHALL MILL A CONTINUOUS 3' STRIP AT BOTH EDGES OF PAVEMENT TO MATCH FLUSH WITH ALL DRIVEWAYS.
- CONTRACTOR SHALL MILL & PROVIDE ASPHALT LEVELING COURSE AT LOCATIONS AS DIRECTED BY TOWN AND/OR ENGINEER.
- ALL BARRICADES AND EQUIPMENT SHALL BE MAINTAINED FREE OF GRAFFITI AT ALL TIMES.

- APPROPRIATE MEASURES TO PROTECT ALL EXISTING PAVERS & CONCRETE WITHIN AND ADJACENT TO PROJECT LIMITS. ANY DAMAGE OR TRACKING OF ASPHALT AND TACK IS CONTRACTOR'S RESPONSIBILITY TO REMOVE OR REPLACE TO THE SATISFACTION OF ENGINEER AND TOWN.
- 8. CONTRACTOR SHALL TAKE ALL APPROPRIATE MEASURE TO PROTECT ALL EXISTING DRIVEWAYS, MAILBOXES, LANDSCAPING, ETC. WITHIN AND ADJACENT TO PROJECT LIMITS. ANY DAMAGE OR TRACKING OF ASPHALT AND TACK IS CONTRACTOR'S RESPONSIBILITY TO REMOVE OR REPLACE TO THE SATISFACTION OF ENGINEER AND TOWN.
- 9. CONTRACTOR SHALL REMOVE ALL MILLING AND ASPHALT DEBRIS THE SAME DAY THE DEBRIS IS CREATED. ANY DEBRIS LEFT OVERNIGHT MAY BE REMOVED BY THE TOWN AT CONTRACTOR'S EXPENSE.
- CONTRACTOR SHALL ACHIEVE A STRAIGHT EDGE OF PAVEMENT AT ALL PROPERTIES.
- 11. STAGING AREA WILL BE IDENTIFIED BY TOWN AND/OR ENGINEER.

CONTRACTOR SHALL VERIFY ALL QUANTITIES TO ENSURE TOTAL CONTRACT AMOUNT FOR THE VARIOUS WORK ITEMS ESTABLISH A TOTAL PRICE FOR COMPLETING THE JOB IN IT'S ENTIRETY.

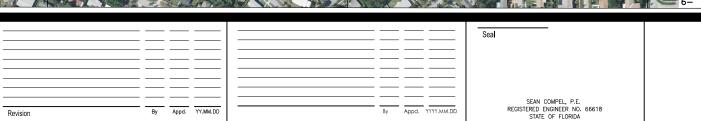



The Contractor shall verify and be responsible for all dimensions, DO NOT scale the drawing - any errors or amissions shall be reported to Stantec without delay, the Copyrights to all designs and drawings are the property of Stantec, Reproduction or use for any purpose other than that authorized by Stantec is forbidden. TOWN OF CUTLER BAY
PTP RESURFACING IMPROVEMENTS
MIAMI, FLORIDA

_		Dwn.	Chkd.	Dsgn.	YY.MM.	
F	ile Name: 215613049 C1.dwg	LF	SC	SC	15.03.0	
	mir am, TEOTADA					


 ASPHALT RESURFACING PLAN

 Project No.
 Scale

 215613049
 Issue/Revision

C1 of 3

BID ITEM NO.	DESCRIPTION	ESTIMATED QUANTITY	UNIT	UNIT PRICE	VALUE
101-1	Mobilization	1	EA	\$0.01	\$0.01
102-1	Maintenance of Traffic	1	EA	\$0.01	\$0.01
327-70-1	Milling Existing Asphalt Pavement (1" Average Depth)	15,165	SY	\$6.49	\$98,420.85
337	Type S-III Asphalt Concrete Surface Course (1")	50,550	SY	\$7.79	\$393,784.50
425-6	Adjusting Valve Boxes	50	EA	\$125.00	\$6,250.00
425-6	Adjusting Manholes	67	EA	\$225.00	\$15,075.00
706-3	Raised Pavement Markers (BLUE)	13	EA	\$5.50	\$71.50
706-3	Raised Pavement Markers	86	EA	\$4.50	\$387.00
711-11125; 711-11211; 706-3	24" White thermoplastic stop bar with 50 feet double yellow, including 6 yellow RPMs	32	EA	\$155.00	\$4,960.00
711-11111	6" White Thermoplastic	752	LF	\$1.50	\$1,128.00
711-11211	6" Yellow Thermoplastic	1,844	LF	\$2.00	\$3,688.00
711-11123	12" White Thermoplastic	1,766	LF	\$2.50	\$4,415.00
711-11125	24" White Thermoplastic	400	LF	\$2.50	\$1,000.00
n/a	"SCHOOL" symbol per FDOT Index No. 17344	1	EA	\$100.00	\$100.00
522-1	Installation of handicap ramps @ new sidewalk - including ADA detectable warning surface (4'x2' @each) (includes restoration)	18	EA	\$275.00	\$4,950.00
522-2	Construct new or replace existing 6" thick 5' wide sidewalk (includes removal, disposal, debris removal, root pruning, preparation and restoration)	1,173	LF	\$43.00	\$50,439.00
		Sub-Total		\$584,668.87	
A-1	Allowance (10%)	1	LS	\$58,466.89	\$58,466.89
		RED ZONE TOTAL:			\$643,135.76

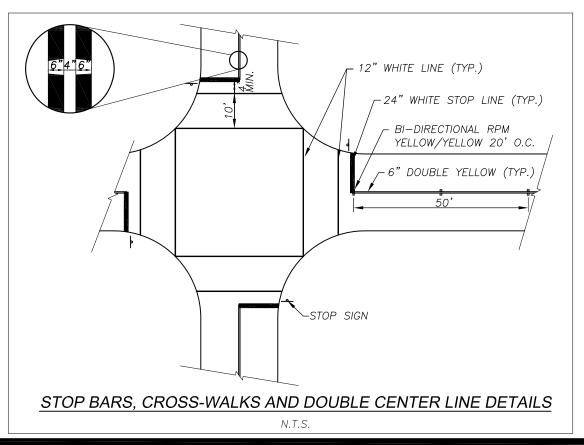

Seal 1. SCHOOL PERIMETER ADDITIONS RHF SC 18.05.17 Revision By Appd. YY.MM.DD By Appd. YYYY.MM.DD



The Confractor shall welly and be responsible for all dimensions, DO NOT scale the drawing- any errors or amissions shall be reported to Stantee without deby, the Copyrights to all designs and drawings are the property of Stantee. Reproduction or use for any purpose other than that authorities day Stantee is factacledin.

PTP RESURFACING IMPROVEMENTS MIAMI, FLORIDA

TOWN OF CUTLER BAY

Project No. Scale 215613049 Issue/Revision

ASPHALT RESURFACING PLAN

C3 of 3

 File Name:
 215613049 C1-rev05-17-2018.dwg
 LF
 SC
 SC
 15.03.06

 Dwn.
 Chkd.
 Dsgn.
 YY.MM.DD

Sample Photos of Existing Roadway Conditions







